

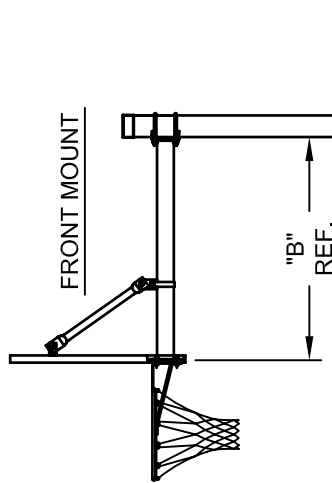


FRONT MOUNT GOAL			
MODEL	DIM. "A" Ft.-In. (Meters)	DIM. "B" In. (Meters)	DIA. "C" In. (MM)
AAB 35F	13'-6" (4.11M)	35" (.89M)	3.5" (89mm)
AAB 45F	13'-6" (4.11M)	47" (1.19M)	4.5" (114mm)

REAR MOUNT GOAL			
MODEL	DIM. "A" Ft.-In. (Meters)	DIM. "B" In. (Meters)	DIA. "C" In. (MM)
AAB 35R	13'-6" (4.11M)	36.3" (.92M)	3.5" (89mm)
AAB 45R	13'-6" (4.11M)	48.3" (1.23M)	4.5" (114mm)

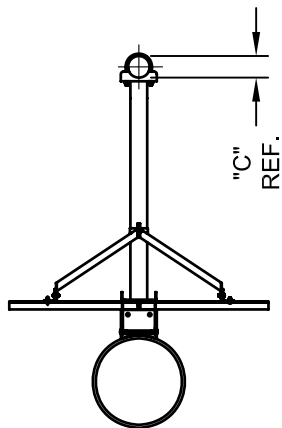

NOTE:
DIMENSION "B" IS FROM THE
FACE OF THE MOUNTING PLATE
TO THE EDGE OF THE POST.

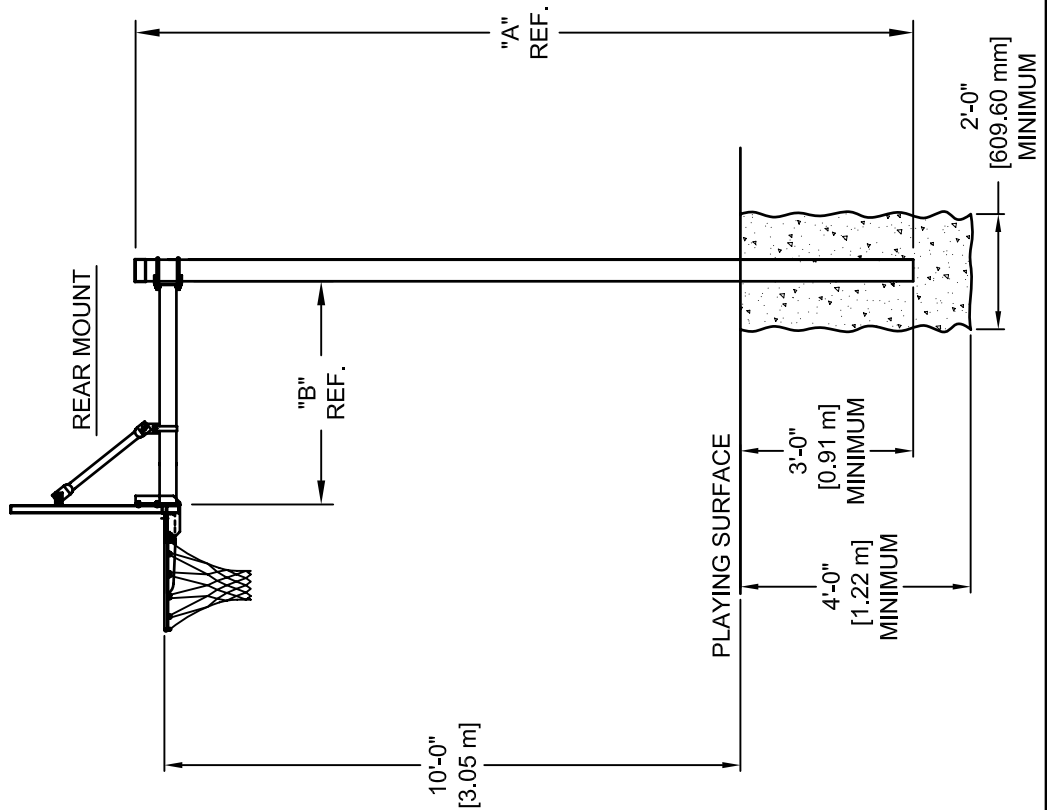

REVISION		
REV.	DATE	BY
A	05/13/03	JJC
B	12/01/03	JJC
C	01/20/06	DAM
D	05/28/08	RWP



Gared Holdings, LLC
9200 E. 146th St. Noblesville, IN 46060

THIS DOCUMENT CONTAINS TRADE SECRET AND OTHER MATERIALS WHICH ARE PROTECTED BY CONFIDENTIALITY NOTICE AND AGREEMENT AND BY COPYRIGHT. ANY USE OR COPYING OF THIS DOCUMENT EXCEPT AS AUTHORIZED BY GARED HOLDINGS, LLC IS STRICTLY PROHIBITED.

ADJUSTABLE ARM BRACED STRAIGHT SYSTEM

DRAWN	CONNERLEY	DATE	05/01/03	MATERIAL	N/A
APPROVED	JJC	DATE	05/01/03	FINISH	N/A
FILE LOC. Q:\Final Release\Specifications				DWG. NO.	AAB35-45
SIZE	SCALE	SHT. NO.	PART NO.	REV	
A	NONE	1 OF 1	AAB35-45	D	



MODEL AAB35 and MODEL AAB45

ADJUSTABLE HEIGHT OUTDOOR BASKETBALL SYSTEM

AAB35

This unit is designed to allow for height adjustment of the extension arm by using two 1/2" diameter "U" bolts that secure extension arm to vertical post. The extension arm shall be 3 1/2" O.D. galvanized pipe and shall extend 36" out from the vertical post. The vertical post shall be 3 1/2" O.D. galvanized pipe with top cap. The mounting plate used as a direct goal attachment for the backboard. Two braces extending from the upper mounting points of the backboard to the extension arm provide added rigidity to the system. The system can be used with all outdoor front and rear mounted boards and goals.

Post shall extend into the concrete footing at least 36". Concrete footing shall be 24" minimum in diameter and 48" minimum deep.

Concrete for installation not included.

AAB45

This unit is designed to allow for height adjustment of the extension arm by using two 1/2" diameter "U" bolts that secure extension arm to vertical post. The extension arm shall be 3 1/2" O.D. galvanized pipe and shall extend 45" out from the vertical post. The vertical post shall be 4 1/2" O.D. galvanized pipe with top cap. The mounting plate used as a direct goal attachment for the backboard. Two braces extending from the upper mounting points of the backboard to the extension arm provide added rigidity to the system. The system can be used with all outdoor front and rear mounted boards and goals.

Post shall extend into the concrete footing at least 36". Concrete footing shall be 24" minimum in diameter and 48" minimum deep.

Concrete for installation not included.